LPA-MP1S-10

High Flow Undersink Filter System



SPECIFICATIONS

Service Flow Rate	1.5GPM (5.67L/min)
Rated Capacity	13,210 Gallons (50,000L)
Operation Temperature	4~38°C (39~100°F)
Pressure Requirements	10~100 psi (0.7~6.9bar)
Inlet / Outlet Connection	3/8"
Electrical Connection	None required
Dimension	Overall : 3.7" x 12.5" Cartridge : Ø3.3" x 10.7"
Weight	0.6kg
Claim	Chlorine, Taste and Odor, Particulate, Bacteria & Cyst, Scale Inhibitor

FEATURES · BENEFITS

- Composite filter is made with carbon and hollow Fiber
- 0.1um pore size can remove bacteria and cyst
- LPA-MP1S-10 has one more carbon block . The carbon block can improve water taste and odor
- Replacement method is easy quick-change.
- Phosphate can prevent to make scale in boiler or heater (phosphate)

APPLICATION

Water Station · ICE · Cold Beverage · Drinking Fountain · Food Service



PART INCLUDED




System tested and certified by NSF International against NSF/ANSI Standards 42 & 401 in System Model LPA-MP1S-10 for reduction claims specified on the performance data sheet.

INSTALLATION INSTRUCTIONS


1. Turn off main tap water
2. Rotate the old cartridge counter clockwise 1/4 turn and pull it out.
3. Insert the new cartridge into the filter head and rotate clockwise 1/4 turn.
4. Place the cartridge to the vertical position.
5. Turn on the main tap water and check for leaks. If leaks occurs, repeat step 1.2.3.4.
   If leaks persist, discontinue use and call your supporting dealer.
6. Flush filter for 10 minutes before use or until water runs clear.

* The system and installation shall comply with applicable state and local regulations.
* Spent adsorption media will not be regenerated and used.


1. Turn off main tap water




2. Rotate the old cartridge counter clockwise ¼ turn and pull in out.

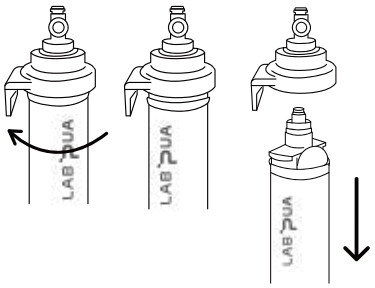


3. Insert the new cartridge into the filter head and rotate clockwise 1/4 turn.

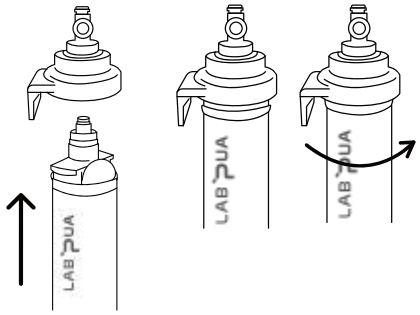

4. Place the cartridge to the vertical position.



5. Turn on the main tap water and check for leaks. If leaks occurs, repeat step 1.2.3.4. If leaks persist, discontinue use and call your supporting dealer.



6. Flush filter for 10 minutes before use or until water runs clear.

